


MODEL SX07

On Surface Scissors Lift

<http://www.peaklift.cn>



The SX07 is equipped with the safety stop device at the height of 300mm, two control buttons are needed to lower down the lift from 300mm to ground with tone alarm for safety.

The SX07 is designed on the C.E. 2010 version EN1493

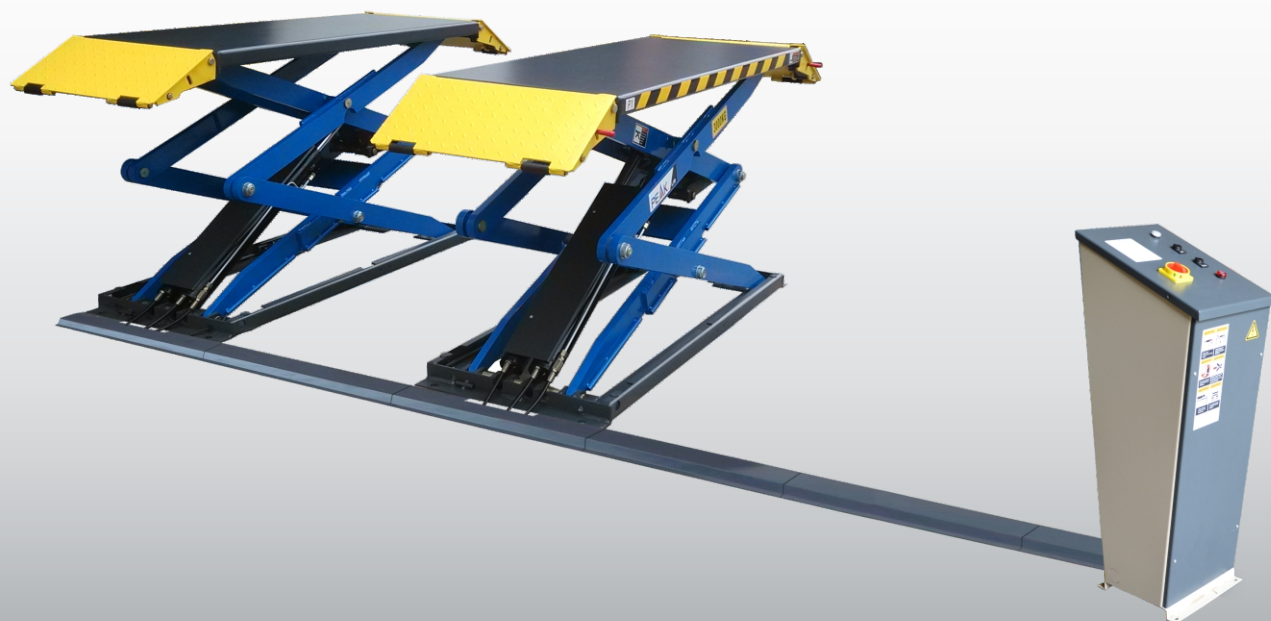

FEATURES

- 2-Dual synchronous cylinders are applied to assure the lifting level on both platforms.
- Automatic safety device controlled electrically. No air needed.
- Hydraulic safety locks system instead of the mechanical safety locks.
- Hydraulic equalization for easy access between ramps.
- Electrical control system operated by Up or Down button.
- Low profile design. The closed height is only 115 mm.






▲ Dual synchronous cylinders




▲ Adjustable ramps and extended platform for longer vehicles.



▲ Low profile design, the closed height is only 115mm.

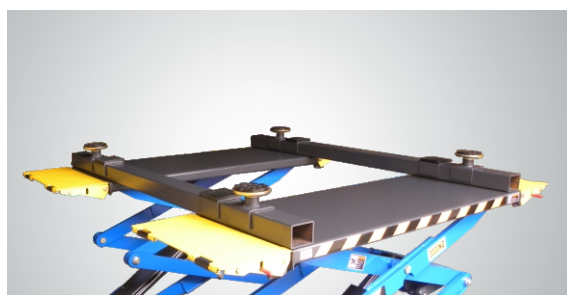

▲ Optional support bars & Kit. recommended for heavier vehicles with narrow frames.
Kits No.:SX703

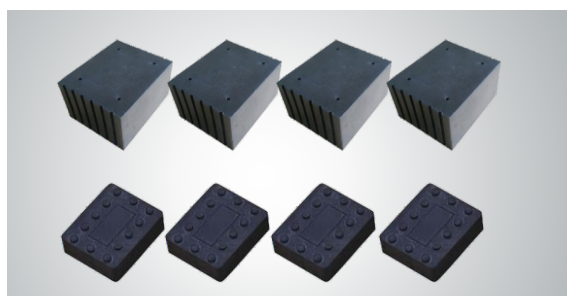

▲ Both 38mm and 75mm height rubber pads included as standard supply.



▲ Optional Mechanical Lock.
Kits No.:SX702

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A		B	C	D	E	Gross Weight	Motor
			Lifting Height	Minimum Height	Runway Length	Width Between Runways	Runway Width	Overall Length (Inc Ramps)		
SX07	3.0 T (7,000 lbs.)	42 Seconds	2000mm (78 3/4")	115mm (4 1/2")	1458mm (57 3/8")	750mm (29 1/2")	600mm (23 5/8")	2028mm (79 3/4")	875Kg (1,929 lbs)	4.0HP