


MODEL PX09

Professional Non-alignment Scissors Lift

<http://www.peaklift.cn>





Optional Jack J6A with 1.5" and 2.5" extension adapters included.

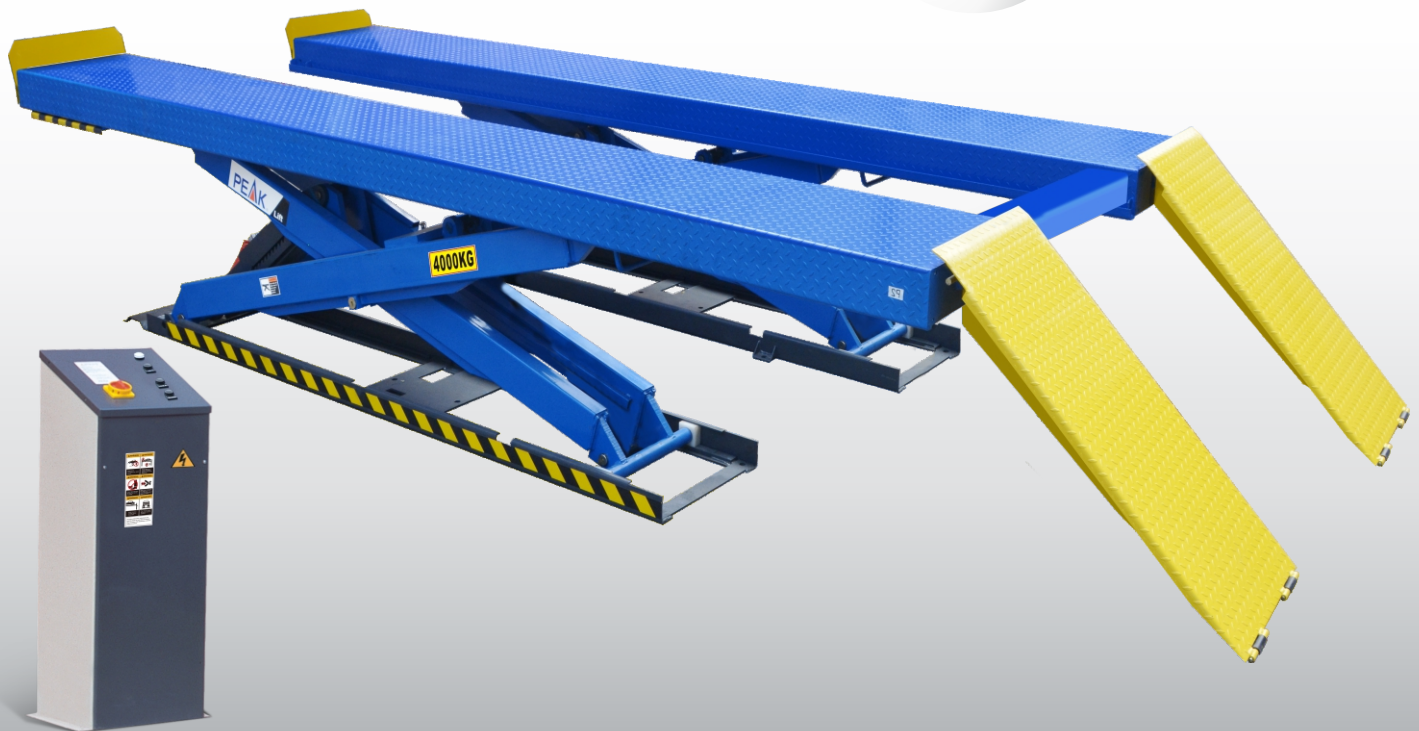

FEATURES

- Dual synchronous cylinders are applied to assure the lifting level on both platforms
- Electro-air control system, mechanical safety locks
- Skid proof diamond platform to avoid skidding.
- Heavy duty design, the X serial scissors lifts use large steel tube to make it strong and assure the runways remain level during working

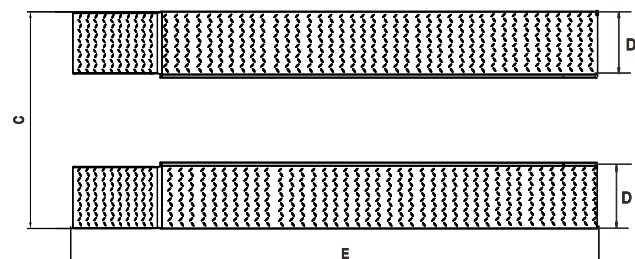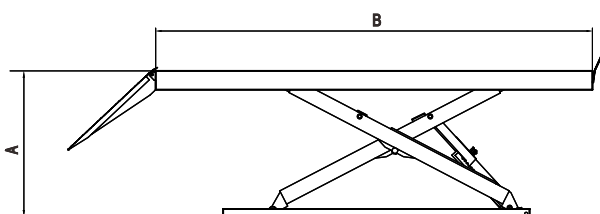


MODEL PX09

Professional Non-alignment Scissors Lift



▲ Electro-air Safety Device

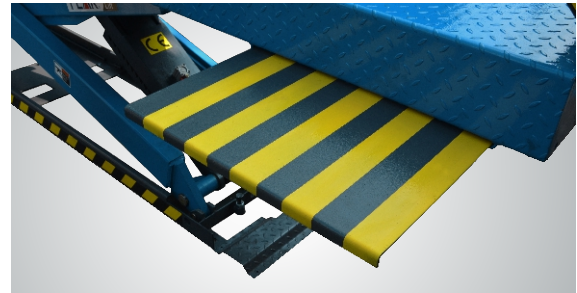

▲ Service shelf for more effective working environments.



▲ Optional extension kits to extend the platform 300mm
Part No. px001.



▲ Optional airline kits. Easy and convenient installation with all models of rolling jacks with a pneumatic pump.
Kits No.:PX004



▲ Optional Rolling Jacks
J6H: manual hydraulic type 2.8 T
J6A: pneumatic hydraulic type 2.8 T
RJ-8A:pneumatic hydraulic type 3.5 T



▲ Optional LED lighting: 24V LED light.
Kits No.:40103

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A		B	C	D	E	F	G	Gross Weight	Motor
			Lifting Height	Minimum Height	Runway Length	Overall Width	Runway Width	Overall Length (Inc. Ramps)	Min.Four Wheel Align	Max.Four Wheel Align		
PX09	4.0T (9,000 lbs)	55 Seconds	1870mm (73 5/8")	300mm (11 3/4")	4828 mm (190 3/4")	2190mm (86 1/4")	625mm (24 5/8")	6594mm (259 5/8")	/	/	1797Kg (3,961 lbs)	3.0HP