

FEATURES

- 15,000 Lb. Capacity
- Dual hydraulic direct-driven cylinders, designed and made on ANSI standard, utilizing NOK oil seal for cylinder
- 3/8" aircraft quality cable is used for synchronization
- Self-lubricating UHMW Polyethylene sliders and bronze bush
- Single-point safety release
- Clearfloor design, provide unobstructed floor space
- Overhead safety shut-off device
- Adjustable three height setting accommodate varying service ceiling heights (The special low setting height 150" need to choose the optional short cables)
- Automatic arms restraints
- Hydraulic power unit



- ▲ The Optional Base Plate Kits No.21501, Including extension frames , and 14 pcs of our standard Anchor Bolts

MODEL 211C 211CH 212C 215C

HEAVY-DUTY LINE OF TWO POST LIFTS

Peak heavy-duty line of two post lifts model 211C、211CH、212C and 215C are specially designed for vehicle from car to truck, with heavy-duty steel construction



Single-point Safety Release

The release lever (next to the power unit) is pulled down to release the locks on both columns from one column. It is more efficient, more reliable, and safer than the dual safety release



EXCLUSIVE FEATURE !


The stackable rubber pads assembly with 1.5", 2.5", 5" extension adapters



(211C/211CH)

EXCLUSIVE FEATURE !

Both asymmetric and symmetric arms for model 211C、211CH

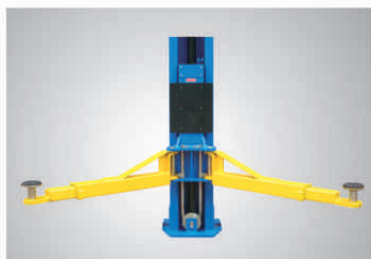

(212C/215C)

Hydraulic direct-driven cylinders, Automatic arms restraints, Protect rubber door guards, Self-lubricated sliders...make PEAK Heavy-duty line of two post lifts with many advanced features and work reliably.

SPECIFICATIONS

Model	Style	Lifting Capacity	Lifting Time	A	B	C	D	E	F	Gross Weight	Motor
				Lifting Height	Overall Height	Overall Width	Drive-Thru Clearance	Width Between Columns	Minimum Pad Height		
211C	Clearfloor Direct-driven	5.0 T (11,000 lbs.)	55 Seconds	1842-2071mm (72 1/2" - 81 1/2")	3635/3735mm (143 1/8"/147")	3492 mm (137 1/2")	2445 mm (96 1/4")	2800 mm (110 1/4")	115 mm (4 1/2")	865Kg (1,906 lbs)	3.0HP
211CH	Clearfloor Direct-driven	5.0 T (11,000 lbs.)	55 Seconds	1842-2071mm (72 1/2" - 81 1/2")	3812/4245/4345 mm (150"/167 1/8"/171")	3492 mm (137 1/2")	2445 mm (96 1/4")	2800 mm (110 1/4")	115 mm (4 1/2")	891Kg (1,965 lbs)	3.0HP
212C	Clearfloor Direct-driven	5.5 T (12,000 lbs.)	55 Seconds	1842-2071mm (72 1/2" - 81 1/2")	3812/4192/4497 mm (150"/165"/177")	3829 mm (150 3/4")	2787 mm (109 3/4")	3137 mm (123 1/2")	115 mm (4 1/2")	966Kg (2,129 lbs)	4.0HP
215C	Clearfloor Direct-driven	6.8 T (15,000 lbs.)	72 Seconds	1872-2101mm (73 3/4" - 82 3/4")	3812/4192/4497 mm (150"/165"/177")	3829 mm (150 3/4")	2787 mm (109 3/4")	3137 mm (123 1/2")	145 mm (5 3/4")	1051Kg (2,317 lbs)	4.0HP